

SELF-CLEANING A GREASE INTERCEPTER

INSTRUCTIONS

1. Remove Top Grease

Remove grease from the top using a slotted spoon or ladle.



2. Scrape the Sides

Remove grease from the sides of the grease trap using a scraper, or similar flat-sided tool.



3. Remove Solids

Remove the solids from the bottom of the grease trap using a strainer.



4. Clean Around Baffle

Pull baffle up and scrape away the grease. Then replace the baffle back into slots.



5. Use Dry Absorbent*

Mix grease and sediment with a dry absorbent, such as kitty litter or sawdust, until there is no free liquid.




6. Dispose of Grease

Dispose of contents in a solid waste container.



7. Record Maintenance

Record grease interceptor maintenance in a logbook.

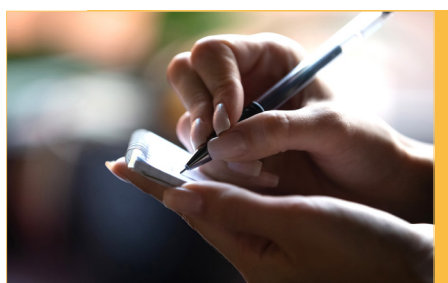

* As an alternative to mixing with a dry absorbent, the removed grease can be placed in a grease container and disposed of by a participating grease pumper company. Contact your fryer grease company and see if they can provide a brown grease container.